


Datasheet


SE50A-OIP FT-IR Ingot Oi Profiler

For Interstitial Oxygen ingot Oi Profiler

Systems Engineering combines the Thermo Fisher Scientific FT-IR measurement technology and to introduce a new generation "FT-IR SE-50 series" silicon ingot material characterization tools.

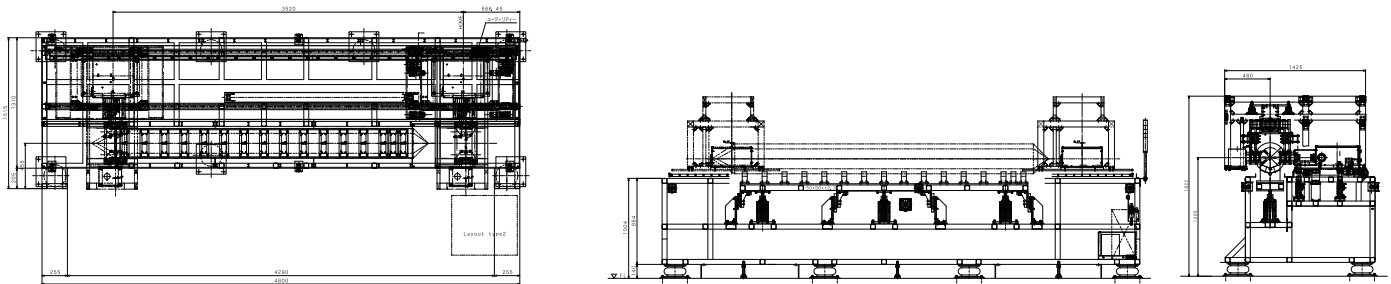

Application Specifications

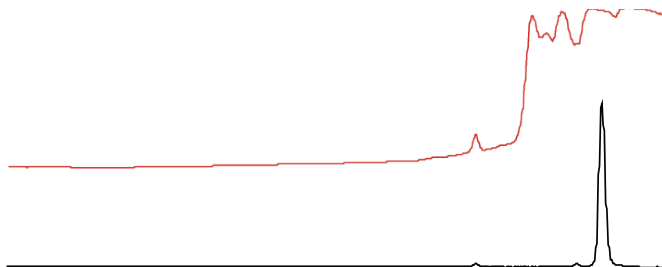

Interstitial Oxygen in Silicon ingot


Range : 0.3 to 35 ppmA
 Precision : STD0.08 ppmA

- Measurement length : 3000 mm
- Minimum pitch : 1 mm
- Position Accuracy : ±0.5 mm
- Ingot Sensing : Automatic detection of upper shoulder position of ingot. Find ingot shoulder any ingot blocks. Up to 10 blocks.
- Ingot stage ingot support : Automatic switching height of 202 and 302 mm by measuring recipe.

DIMENSION, UTILITY AND ENVIROMENTAL

Dimension : 4800w x 1515d x 1822h mm without EMO and signal light.
 PC rack is 659w x 600d x 1480h mm

Operation Software

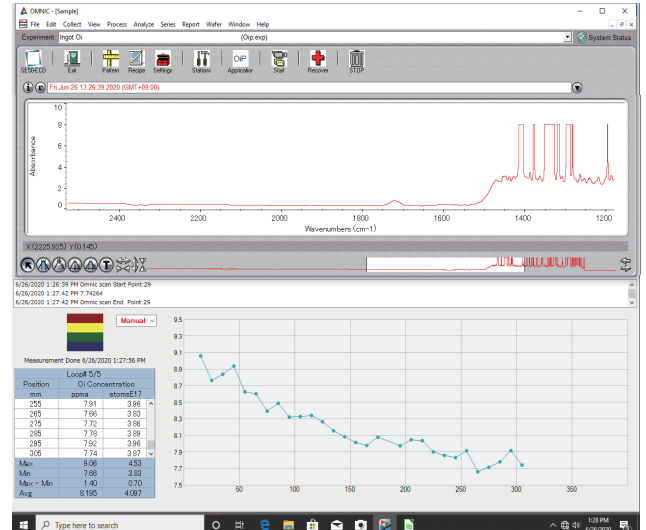

- Intuitive Graphical User Interface
- Easy-to-Use operator and Authorized engineer user levels
- Easy to learn and use, giving optimum efficiency
- Measurement result, display and data logging.

Specifications

RELIABILITY

MTBF	> 3 months
MTTR	48 hours
MTTS	4 hours
Uptime	> 97%

Computer Specifications

Operation System	Windows 10 64bit
	Memory 32GB
	Hard Disk SSD RAID1

OPTICAL

Spectral Range	7800 - 350cm ⁻¹
Spectral Resolution	0.5cm ⁻¹
Beam Diameter	Standard 8mm (Variable)
Analysis Angle	15°

FACILITY REQUIREMENTS

Power	100 - 240V (50/60Hz)
House Vacuum	-61±10kPa (G) 30L/min (ANG)
Pressurized Gas	CDA 0.52 - 0.6Mpa (G) 30L/min (ANR)
	N ₂ 0.2MPa (G) 15L/min (ANR)



SE50 Product Line

Hardware					Software	
Product#	Model	Wafer size	Station	Handring	Product#	Model
ECO-02S	SE50S-ECO	2-12 inch	Stage	Edge Grip	ECO-1EP	Epitaxial Thickness
ECO-031	SE50A-ECO_150SS	2-6 inch	Single	Vacuum	ECO-1CO	Carbon & Oxygen in Silicon
ECO-032	SE50A-ECO_150DS	2-6 inch	Double	Vacuum	ECO-1BP	Boron & Phosphorus in BPSG or PSG Films
ECO-041	SE50A-ECO_200SS	4-8 inch	Single	Vacuum	ECO-1SN	Hydrogen in Silicon Nitride
ECO-042	SE50A-ECO_200DS	4-8 inch	Double	Vacuum	ECO-1SF	Fluorine in Silicon Oxide Films
ECO-043D	SE50A-ECO_200DSMIF	8 inch	Double SMIF	Vacuum	ECO-1MB	Multi Background Option
ECO-044	SE50A-ECO_200FS	4-8 inch	Four	Vacuum	ECO-1GM	GEM/SECS Host Communication
ECO-051	SE50A-ECO_300SS	8-12 inch	Single	Vacuum	ECO-1SH	Share File Host Communication
ECO-052	SE50A-ECO_300DS	8-12 inch	Double	Vacuum	ECO-1DS	Double Station Sorting Support
ECO-051F	SE50A-ECO_300SF	8-12 inch	Single Foup	Vacuum	ECO-1FS	Four Station Sorting Support
ECO-052F	SE50A-ECO_300DF	8-12 inch	Double Foup	Vacuum	ECO-1SS	Six Station Sorting Support
ECO-051E	SE50A-ECO_300SSE	12 inch	Single	Edge Grip	ECO-1OH	Hydrogen in Silicon Software
ECO-052E	SE50A-ECO_300DSE	12 inch	Double	Edge Grip	ECO-1SC	SiC Epitaxial Thickness Support
ECO-051FE	SE50A-ECO_300SFE	12 inch	Single Foup	Edge Grip	ECO-1SU	Shuttle Background Software
ECO-052FE	SE50A-ECO_300DFE	12 inch	Double Foup	Edge Grip	ECO-1CH	Carbon-doped Films
THZ-02	SE50A-THZ_150SiSD	4-6 inch	Double	Vacuum	ECO-1SO	Silicon Oxide Film Analysis (SiXx)
THZ-04	SE50A-THZ_150SiSF	4-6 inch	Four	Vacuum		
THZ-06	SE50A-THZ_150SiSS	4-6 inch	Six	Vacuum		
Product#	Model	Wafer size			Option	
OIP-101	SE50A-OIP	8-12inch			Product#	Model
					ECO-FA1	200mm wafer adapter for FOUP system
					ECO-FA2	Tag Reader for FOUP & SMIF system • Keyence : BL600 • Omron : V640
					ECO-FA3	E84 OHT Support for OHT COM module
					ECO-FA4	Safety Light Curtain for OHT
					ECO-FA5	Sensing Ionizer System
					ECO-FA6	Water ID Reader Module
					ECO-FA7	Optical FFU (Fan Filter Unit)
					ECO-FA8	Share File Host Communication